

**ATTACHMENT 7 SCOPE OF WORK
(Also APPENDIX A-1 of Standard Agreement)**

OVERVIEW:

The work under this section includes the purchase and installation of floor covering material including but not limited project preparation work, materials, labor, equipment, clean-up, and performance of all operations in connection with the installation of the floor covering materials as specified herein or reasonable required to complete the work.

MATERIALS SHALL BE AS FOLLOWS:

Administration and Chambers 4 & 5 Carpet Specifications:

Manufacturer:..... Shaw
Division: Queen Commercial Carpets
Style Name:Change In Attitude Tile
Construction:..... Graphic Loop
Pile Yarn Type: 66% eco*solution Q Nylon, 34% Space Dyed Nylon
Dye Method: Solution Dyed / Space Dye
Gauge:..... 1/10
Stitches per Inch: 10
Pile Height:282
Pile Weight:..... 26 oz.
Finished Pile Thickness:117"
Primary Backing:..... Polypropylene
Secondary Backing: eco*worx
Width: 24" x 24"
Total Weight:..... 103 oz. / sq. yd.
Density:..... 8,000 oz. / cu. Yd.
Weight Density:..... 208,000 oz. / cu. Yd.
ASTM E-648 Radiant Panel: Class I
NBS Smoke Chamber Test: Less than 450 (flaming)
Static Propensity: 3.5 K.V. or less (as tested in accordance w/ AATCC-134)
Pattern Repeat:..... 3"W x 3"L
Warranty: Lifetime Commercial Warranty

Court Room #4 & Jury Room #2 Lower Level Storage Carpet Specifications:

Manufacturer:..... Philadelphia Commercial
Style Name: Hot Circuit
Style Number: 54417
Construction:..... Graphic Loop
Pile Yarn Type: 75% eco*solution Q Nylon, 25% Space Dyed Nylon
Dye Method: Solution Dyed / Space Dye
Gauge:..... 1/10
Stitches per Inch: 8
Pile Height: 190"
Pile Weight:..... 26 oz.
Finished Pile Thickness:112"
Primary Backing:..... Woven Synthetic
Secondary Backing: StaLok Pattern

Width: 12'
Total Weight:..... 62.89 oz. / sq. yd.
Density:..... 8,357 oz. / cu. Yd.
Weight Density:..... 217,282 oz. / cu. Yd.
ASTM E-648 Radiant Panel: Class I
NBS Smoke Chamber Test: Less than 450 (flaming)
Static Propensity: 3.5 K.V. or less (as tested in accordance w/ AATCC-134)
Pattern Repeat:..... 20/32" w x 5 21/32"
Warranty: Lifetime Commercial Performance

CARPET BANDING COVING MATERIAL FOR CARPET AREAS:

Manufacture, color, and style to match carpet installed. Metal trim color to be determined and provided at awarded contract.

VINYL COVING MATERIAL FOR CARPET STORAGE AREAS:

Shall be as manufactured by Nafco, Domco, Azrock, semi-gloss finish rubber wall base, w/ 4" high with ribbed backing. Color to be determined and provided at awarded contract.

MANUFACTURER'S SPECIFICATIONS:

Materials and their installation shall be in compliance per the manufacturer's specified product specifications.

ALTERNATIVE MATERIALS:

Submittal of alternate materials must be equal to or exceed Court specified materials. Samples shall be submitted to the Court and must be approved by the court prior to their use.

LEFTOVER MATERIAL:

Any leftover flooring material from this project shall be made available to the Court for selection to its inventory.

At the request of the Court, one additional box of carpet tiles is to be ordered

WORK SCHEDULE:

Project work phases may be scheduled at any time Monday - Friday between the hours of 5:30 PM to 6:00 AM, weekends, and /or holidays in order to be free of employee and public traffic flow and the creation of any noise. Court business during business hours is not to be disturbed or interrupted at any time.

Areas where work is taking place must be fully completed and ready for occupancy for the Court to continue with its business schedule the following business day.

The Court must be in agreement with the contractor's work scheduled in advance and prior to the commencement of any work.

Court business hours are Monday - Friday during the hours of 7:30 A.M. to 5:00 P.M.

FURNISHINGS:

It shall be the responsibility of the floor covering vendor to move / re-install room furniture as needed in order to complete successfully project installation work phase; this includes fastened furniture which shall be returned to its required fastened state to concrete flooring.

Court employee items and data equipment shall be removed from furniture by Court Staff.

DISPOSAL OF EXISTING FLOOR MATERIAL:

Facility dumpsters are not to be utilized for the disposal of any removed flooring material.

PREP-WORK:

All floor prep-work shall be performed by Flooring Contractor as required to existing floors and walls prior to the installation of new floor and wall material as specified and per new material manufacturer's requirements.

All work shall be completed to a smooth, leveled, and professional standard.

Vendor and work force shall be fully responsible in keeping the court free of any damage or liability during the course of this project. Vendor shall be responsible for any damage caused by their workforce.


This project constitutes a "Public Works" contract as defined under the Labor Code of California - Department of Industrial Relations, Sub-Section 1720(a) & 1771. Consequently, workers employed on this project must be paid the general rate of per-diem wages for each craft, classification, and of type of worker needed to execute this project agreement.

Contractor shall be responsible in obtaining up-to-date prevailing wage labor code schedule; and may be required to submit "Prevailing Wage Certified Payroll" at the completion of the project upon request by the Court.

WARRANTY:

Barring unforeseen conditions, vendor shall guarantee installation of materials for a period of not less than five (5) years. Product shall carry a ten year warranty.

FIRST FLOOR

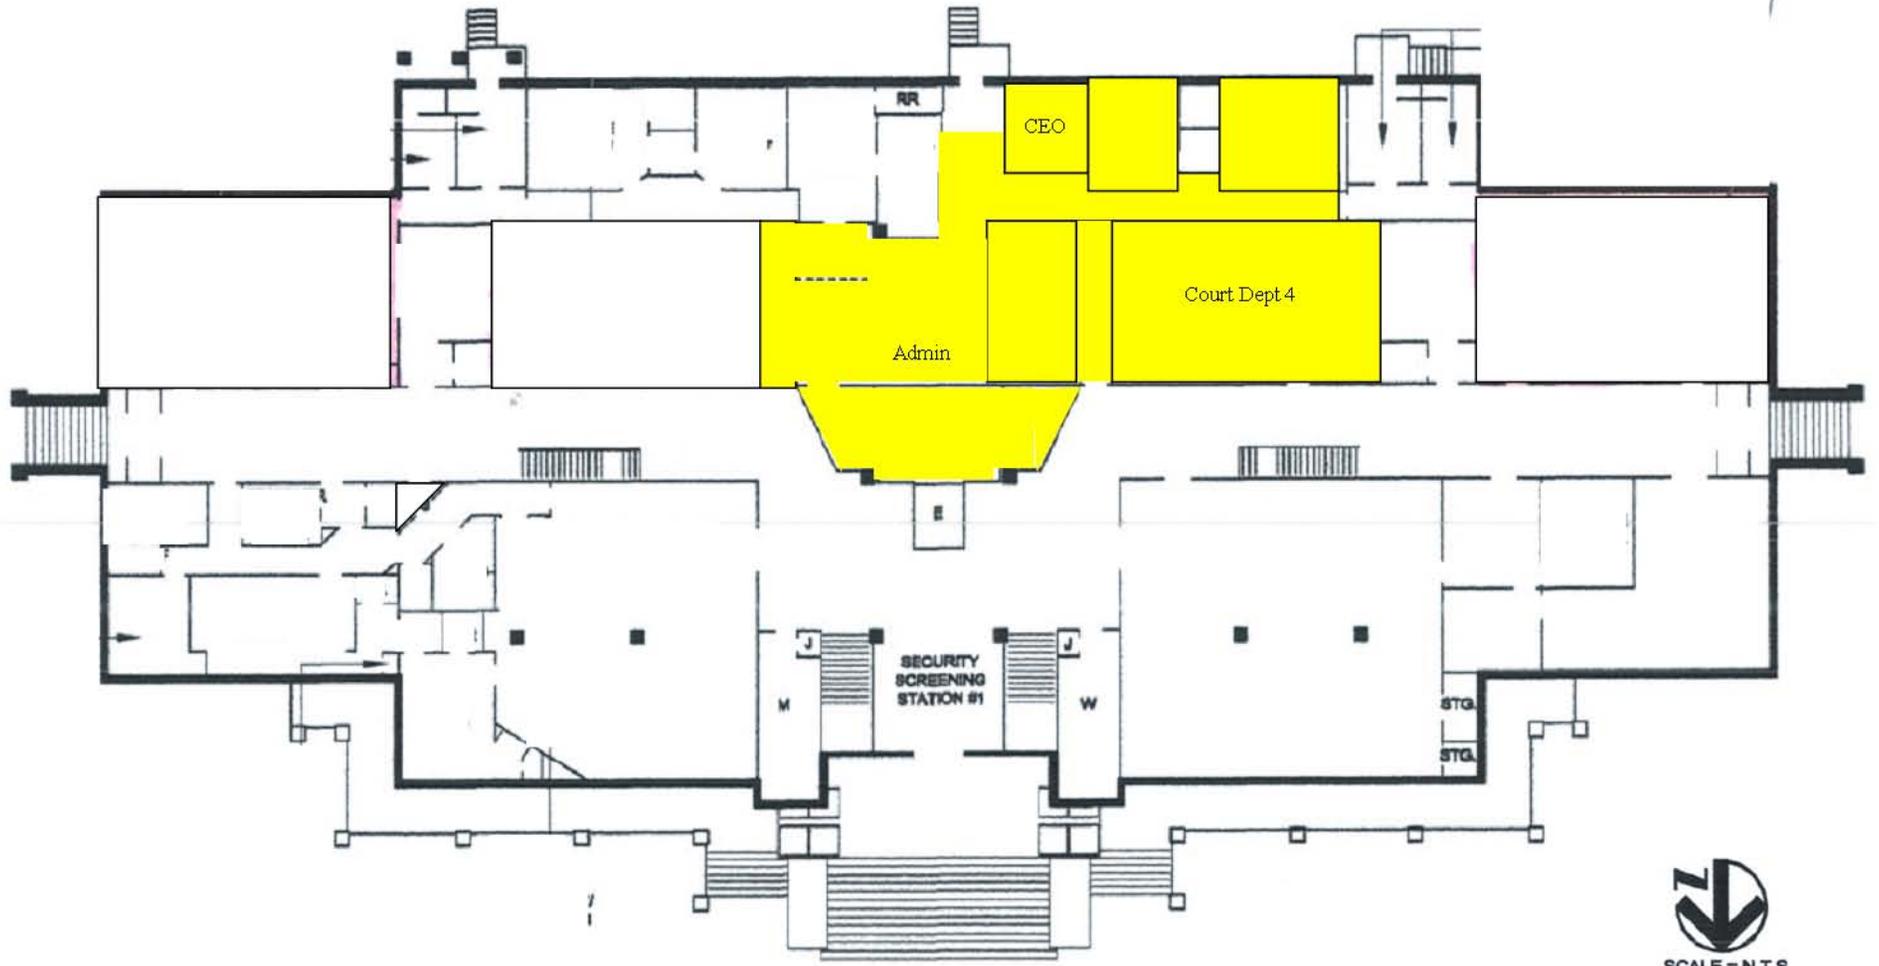

 Work area

LOWER LEVEL

